
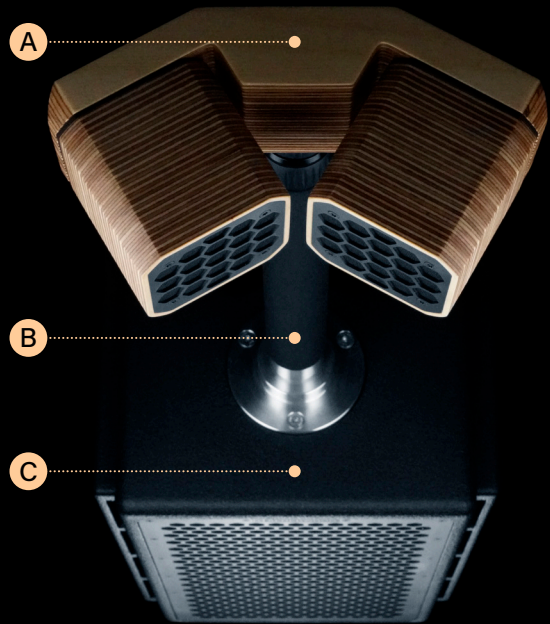


# PEGASUS PRO

Portable micro PA

ALDERWOOD

Our *instrument for all instruments*, the Pegasus Pro portable micro PA carries the Alderwood sound from venue to venue. Its lightweight, simple to setup and sounds incredible.

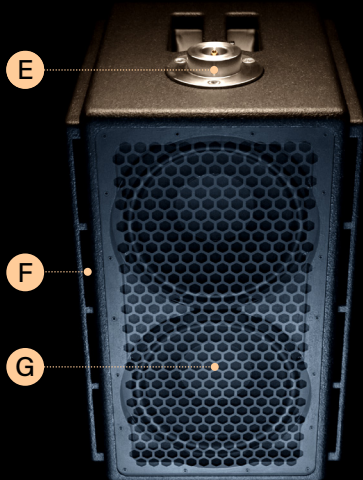

## Plug & play

Weighing just 14kgs, the Pegasus Pro is effortlessly portable and quick to setup. Simply attach the extendable boom pole and Hydra to their locking mounts, connect your audio and power cables, and turn it on.




## Pro performance

Featuring lightweight dual 8 inch carbon composite drivers, large voice coils and high gauss neodymium magnets, the Pegasus Pro is highly efficient and delivers exceptional sound quality.

- A Hydra
- B Extendable boom pole
- C Subwoofer
- D Quick release system
- E Alderwood lock
- F Front firing aerodynamic ports
- G Dual 8" carbon composite drivers

## Frequency response

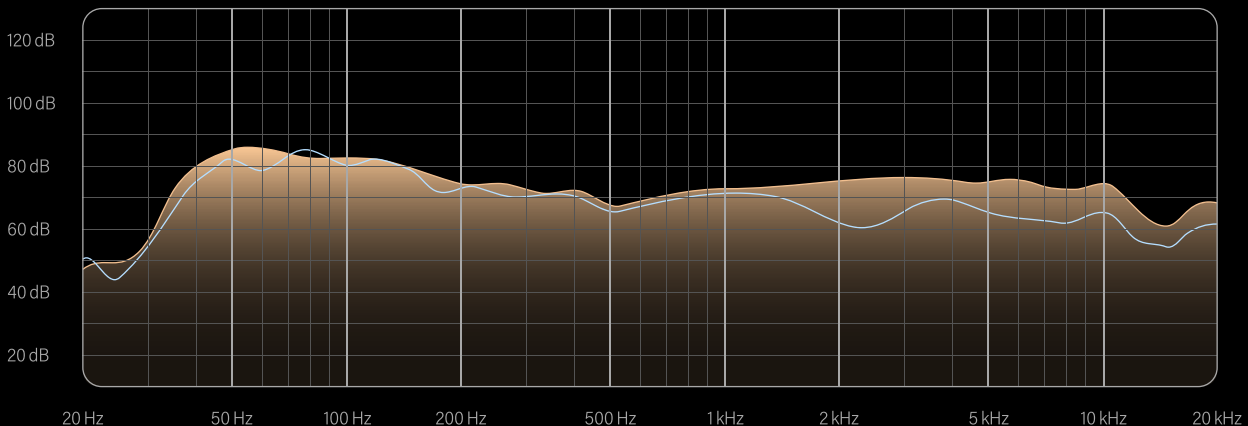


Pegasus Pro 0° on-axis & 90° off-axis comparison, boom pole fully extended, mic height 1.7 meters, mic distance from speaker 3 meters, volume set low.

# PEGASUS PRO

Portable micro PA

**ALDERWOOD**

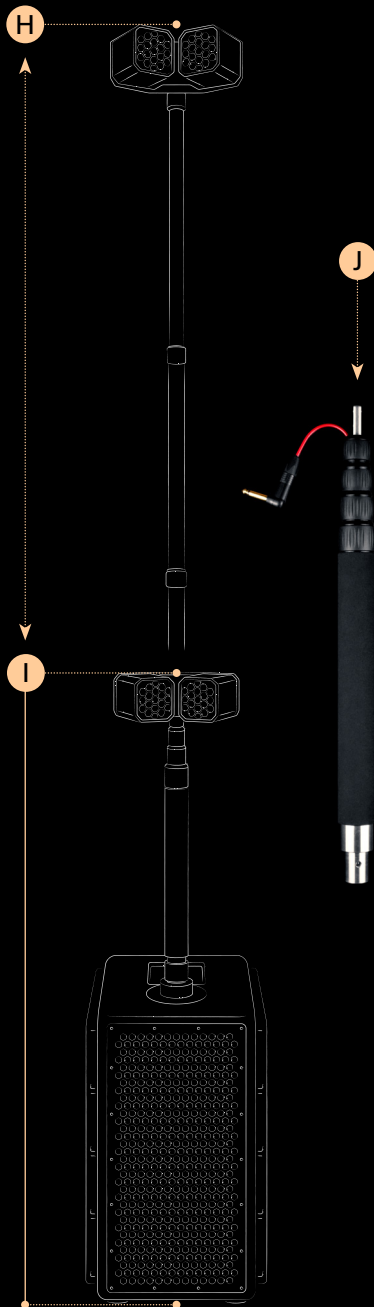

## Quick reference


<b>H</b>	Maximum height	202 cm
<b>I</b>	Minimum height	102 cm
<b>J</b>	Boom pole	52.5 cm

## Hydra

<b>K</b>	Width	21 cm
<b>L</b>	Height	7 cm
<b>M</b>	Depth	12 cm
<b>N</b>	Input	1/4" TRS Jack
Colour		Clear ceramic
Driver size		Dual 2" extended range
Moving mass		1.2 g x2
Maximum cone excursion		5.5 mm
Amplifier power		250 W
Beamwidth		180° H / 120° V

## Subwoofer

<b>O</b>	Width	29 cm
<b>P</b>	Height	48 cm
<b>Q</b>	Depth	35 cm
<b>R</b>	Signal I/O	Balanced XLR
<b>S</b>	Power I/O	PowerCON
Colour		Black
Driver size		Dual 8" woofers
Moving mass		34 g x2
Maximum cone excursion		11 mm
Amplifier power		800 W
Beamwidth		Bass Cardioid -4dB rear

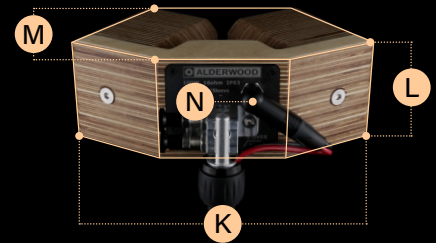

## In the box

- Hydra
- Pegasus Pro subwoofer
- Extendable boom pole
- Power lead
- User manual



## In more detail

Sensitivity @ 1 Mtr	97 dB
Frequency range	40 - 20,000 Hz
Weight	14 kg
Cabinet material	Premium birch ply
Environmental rating	IP50
Driver suspension surround	Butyl rubber
Magnet assembly	High-temp Neodymium
Guass	1.2 Tesla